

## 2. Horn System

### A: WIRING DIAGRAM


#### 1. HORN

<Ref. to WI-142, WIRING DIAGRAM, Horn System.>

### B: INSPECTION

#### 1. HORN RELAY

Measure the security horn relay resistance between terminals (indicated in the table below) when connecting terminal No. 4 to battery positive terminal and terminal No. 3 to battery ground terminal.

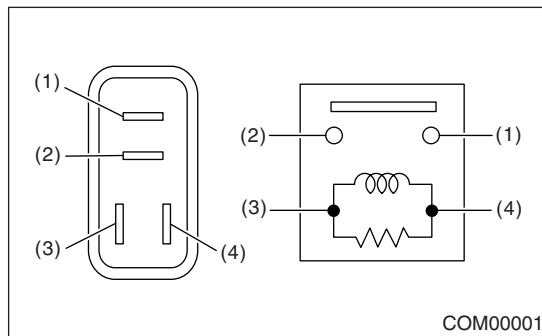

| Current | Terminal No. | Standard             |
|---------|--------------|----------------------|
| Yes     | 1 and 2      | Less than 1 $\Omega$ |
| No      |              | 1 M $\Omega$ or more |