

6. Stop Light System

A: WIRING DIAGRAM


1. STOP LIGHT

<Ref. to WI-127, WIRING DIAGRAM, Stop Light System.>

B: INSPECTION

1. STOP LIGHT SWITCH

Measure the stop light switch resistance.

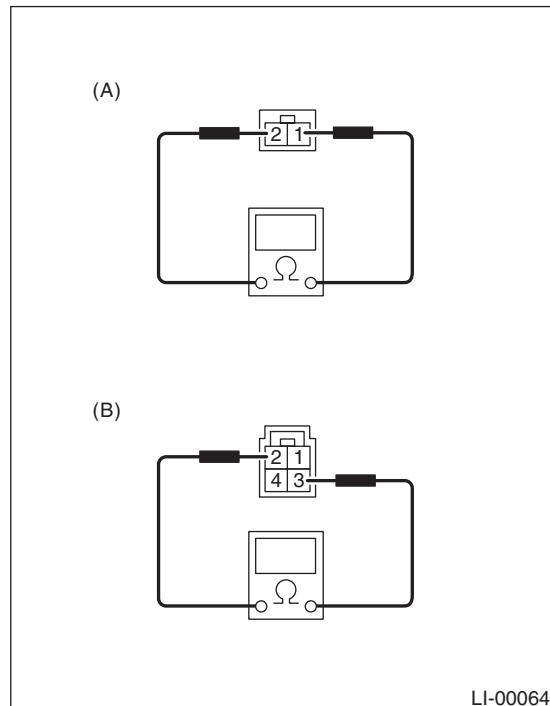

(A) Model without cruise control

(B) Model with cruise control

Switch position	Terminal No.	Standard
When brake pedal is depressed	1 and 2: Model without cruise control	Less than 1 Ω
When brake pedal is released	2 and 3: Model with cruise control	1 M Ω or more