
1. General Description

A: COMPONENT

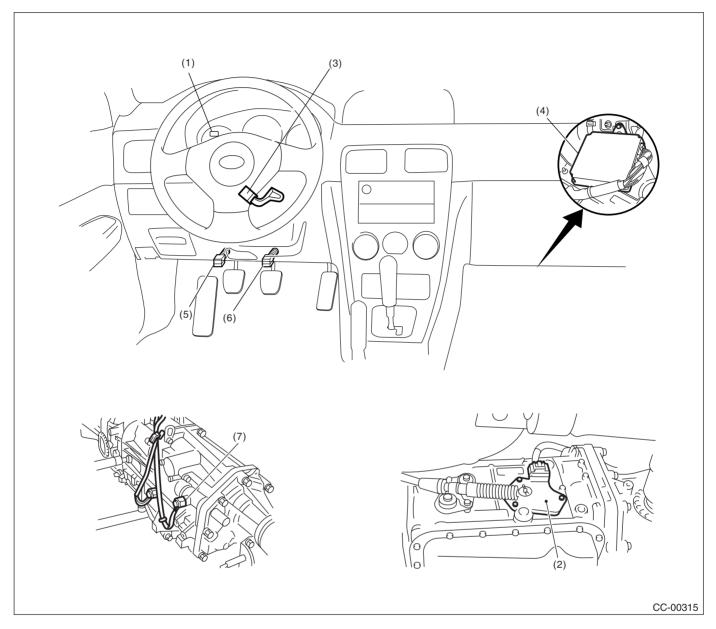

- Cruise indicator & cruise set indicator light
- (2) Inhibitor switch (AT model)
- (3) Cruise control command switch
- (4) Engine control module (ECM)
- (5) Clutch switch (MT model)
- (6) Stop light and brake switch
- (7) Neutral position switch (MT model)

B: CAUTION

- Before disassembling or reassembling parts, always disconnect the battery ground cable from battery. When repairing the radio, control module, etc. which are provided with memory functions, record the memory contents before disconnecting the ground cable from battery. All memory is cleared.
- Reassemble the parts in the reverse order of disassembly unless otherwise indicated.
- Adjust the parts to specifications specified in this manual.

- Connect the connectors and hoses securely during reassembly.
- After reassembly, ensure functional parts operate properly.

C: PREPARATION TOOL

TOOL NAME	REMARKS
Circuit tester	Used for measuring resistance and voltage.
TORX [®] BIT T30 (Tamper resistant type)	Used for removing the cruise control command switch.