


## 13. Rear Accessory Power Supply Socket

### A: REMOVAL


#### 1. FRONT

- 1) Disconnect the ground cable from battery.
- 2) Remove the console cover. <Ref. to EI-37, REMOVAL, Console Box.>
- 3) Disconnect the harness connector, and remove the accessory power supply socket.

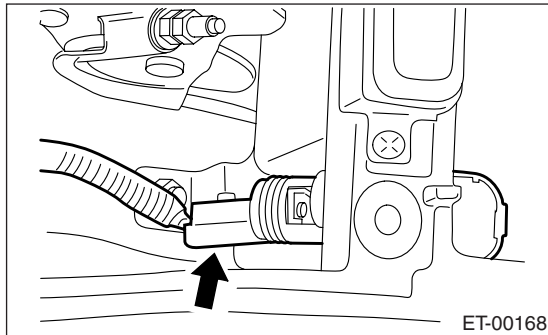

#### 2. REAR

- 1) Disconnect the ground cable from battery.
- 2) Remove the rear quarter lower trim. <Ref. to EI-43, REMOVAL, Rear Quarter Trim.>
- 3) Disconnect the harness connector, and remove the accessory power supply socket.

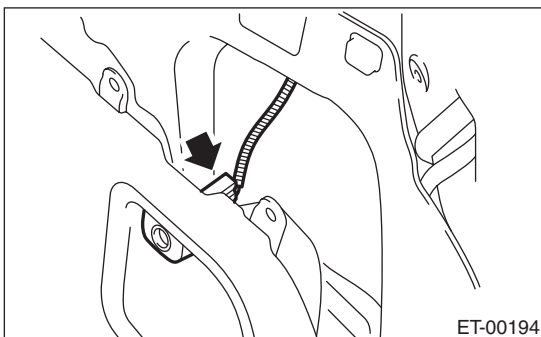

### B: INSTALLATION

Install in the reverse order of removal.

# COMMUNICATION SYSTEM

*COM*

---

	Page
1. General Description .....	2
2. Horn System .....	3
3. Horn .....	4
4. Horn Switch .....	5

