



14. Front Fog Light Assembly

A: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Remove the front bumper. <Ref. to EI-21, REMOVAL, Front Bumper.>
- 3) Remove the lower side bolt.

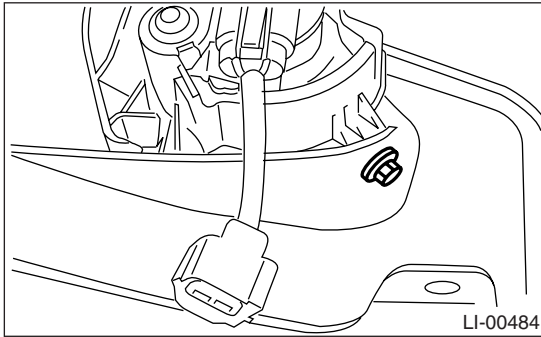

- 4) Remove the upper side clip, and then detach the fog light assembly.

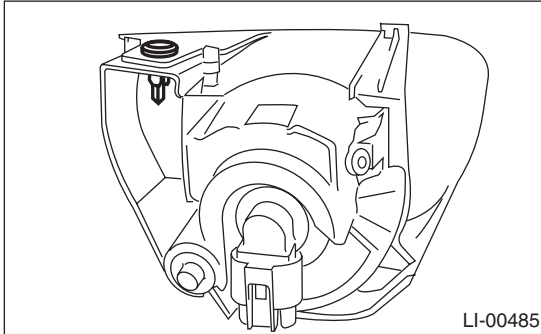

B: INSTALLATION

Install in the reverse order of removal.