


1. CENTER STRUCTURE

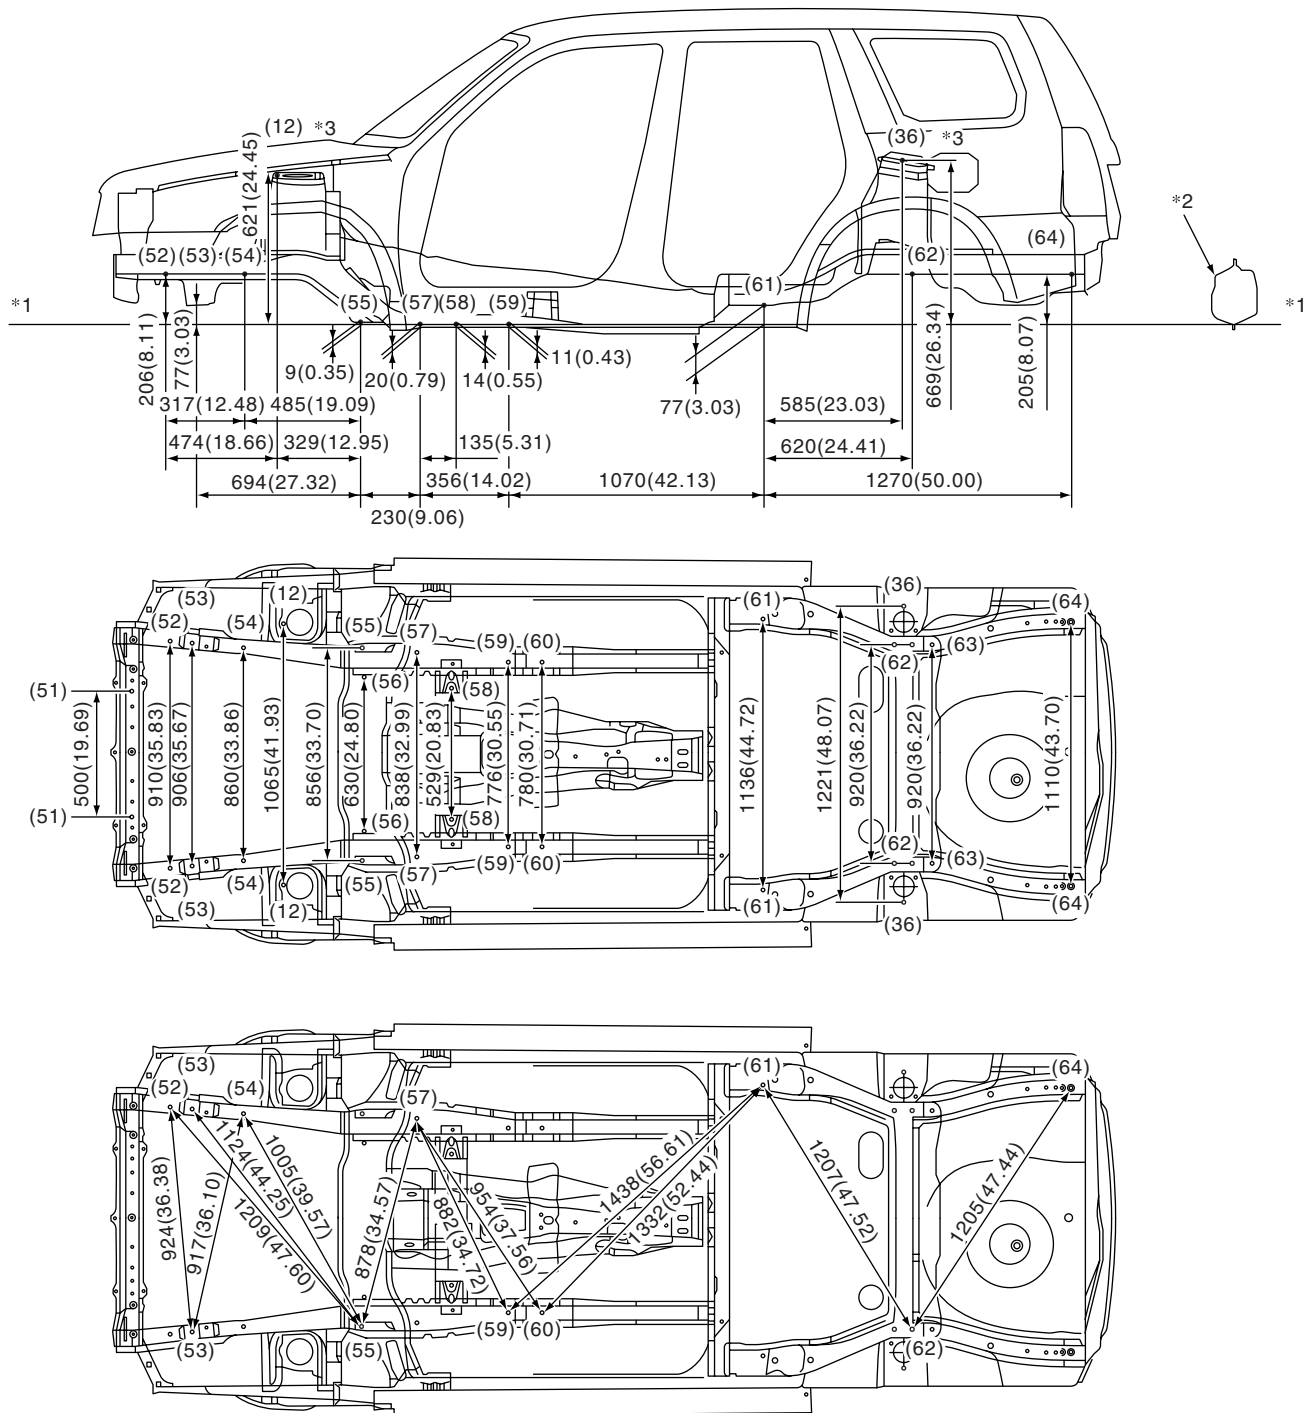

BS-00035

*1: Standard Line

*2: Side sill


*3: Upper surface

Unit: mm (in)

Datum Dimensions

BODY STRUCTURE

2. SUSPENSION CROSSMEMBER

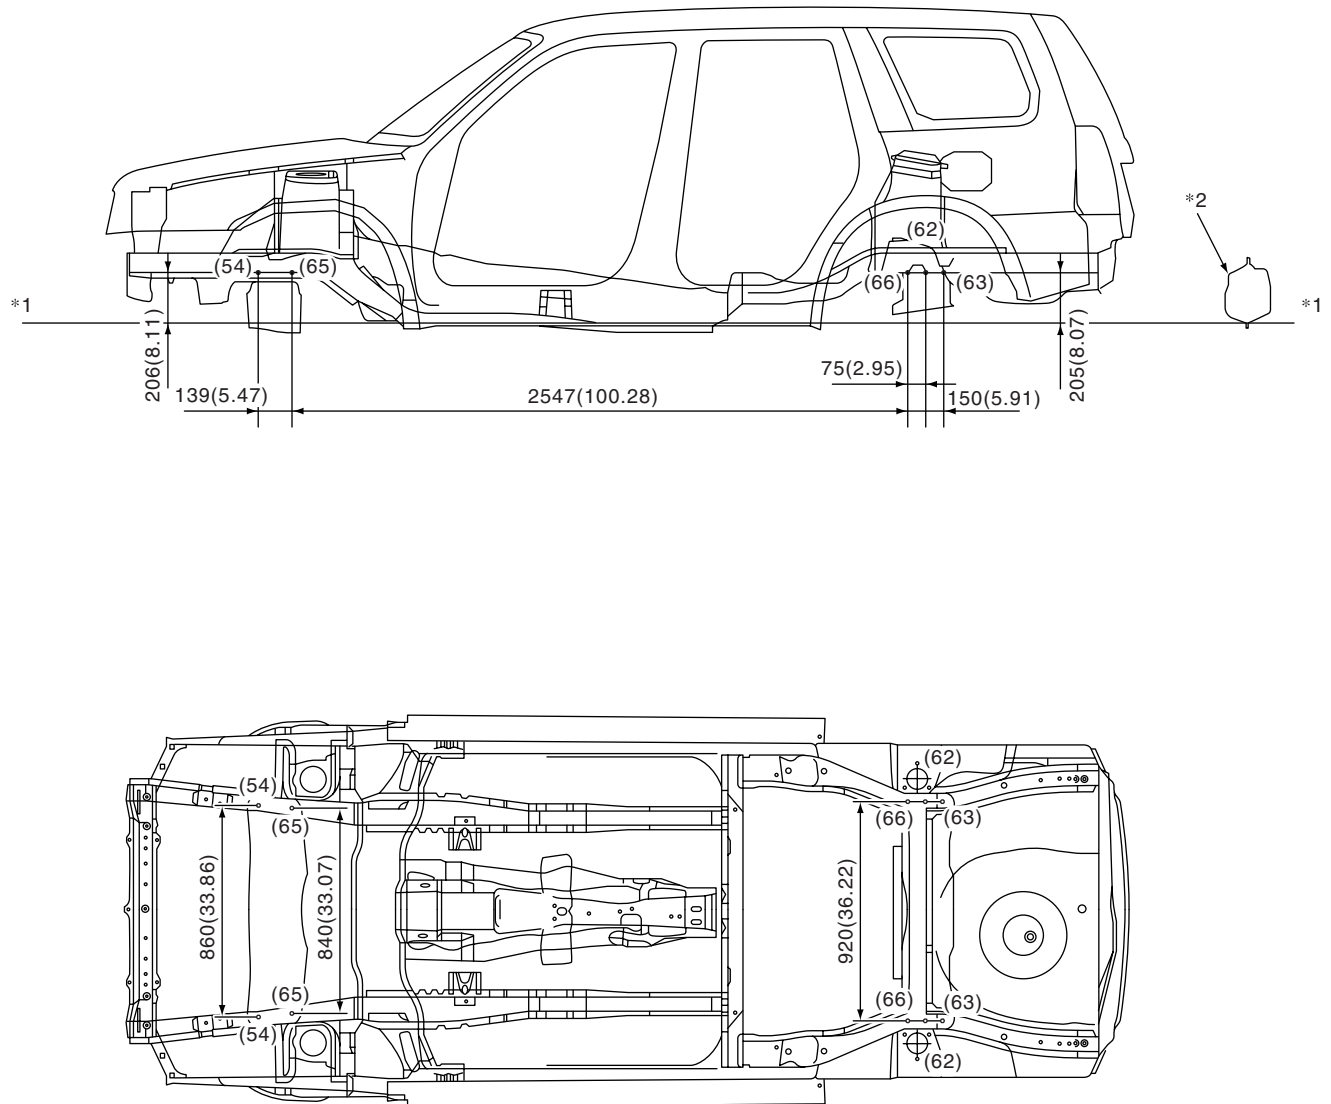


BS-00036

*1: Standard Line

*2: Side sill

Unit: mm (in)

3. FRONT STRUCTURE

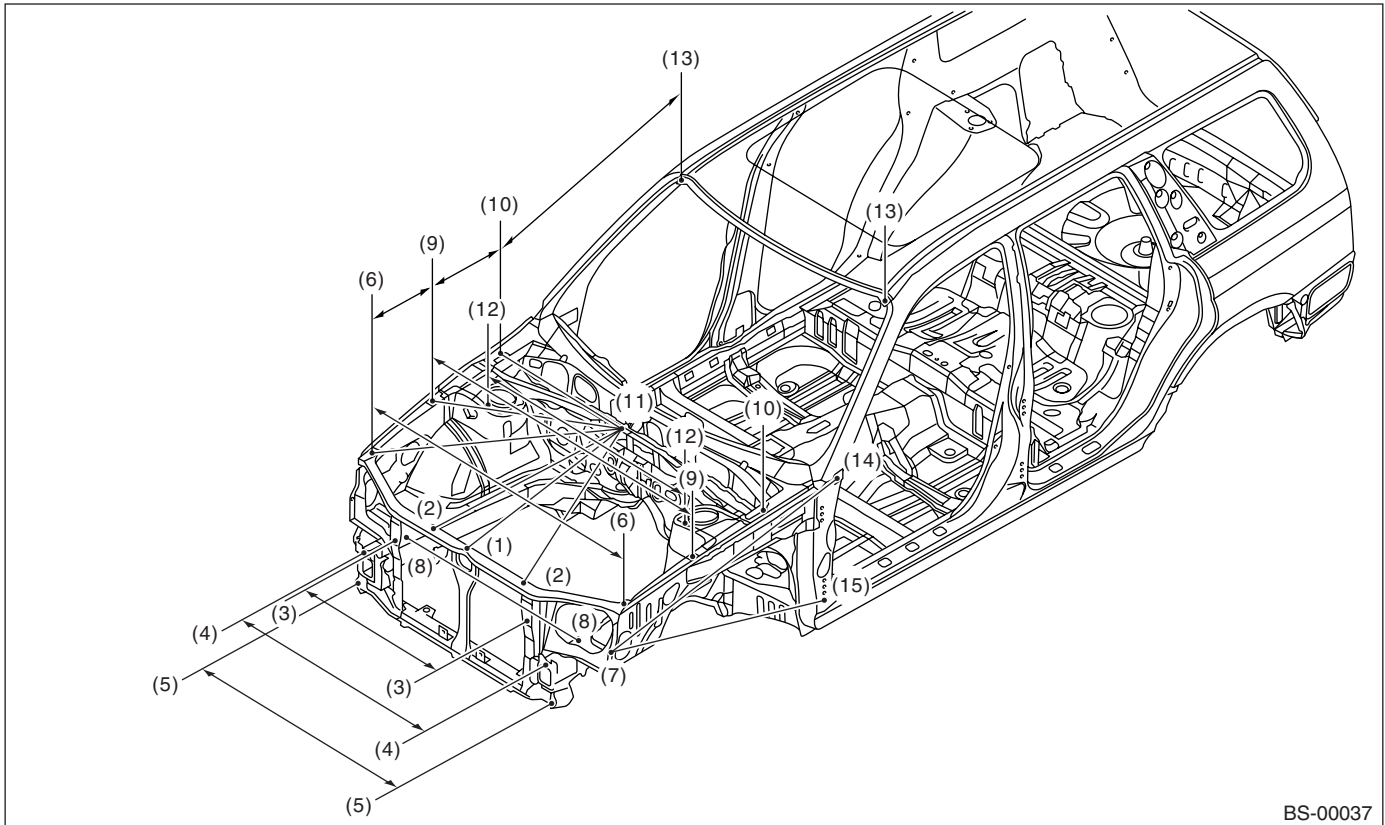


BS-00037

Unit: mm (in)			
Point of measurement	Dimension	Point of measurement	Dimension
(1) to (11)	822 (32.36)	(7) LH to (15) LH	1,092 (42.99)
(2) RH to (11)	842 (33.15)	(8) RH to (8) LH	921 (36.26)
(2) LH to (11)	875 (34.45)	(9) RH to (9) LH	1,396 (54.96)
(3) RH to (3) LH	716 (28.19)	(9) RH to (10) RH	398 (15.67)
(4) RH to (4) LH	978 (38.50)	(9) LH to (10) LH	398 (15.67)
(5) RH to (5) LH	1,049 (41.30)	(9) RH to (11)	767 (30.20)
(6) RH to (6) LH	1,341 (52.80)	(9) LH to (11)	767 (30.20)
(6) RH to (9) RH	349 (13.74)	(10) RH to (11)	722 (28.43)
(6) LH to (9) LH	349 (13.74)	(10) LH to (11)	722 (28.43)
(6) RH to (11)	944 (37.17)	(10) RH to (13) RH	907 (35.71)
(6) LH to (11)	944 (37.17)	(10) LH to (13) LH	907 (35.71)
(7) RH to (14) RH	1,184 (46.61)	(11) to (12) RH	565 (22.24)
(7) LH to (14) LH	1,184 (46.61)	(11) to (12) LH	565 (22.24)
(7) RH to (15) RH	1,092 (42.99)	(12) RH to (12) LH	1,065 (41.93)

Datum Dimensions


BODY STRUCTURE

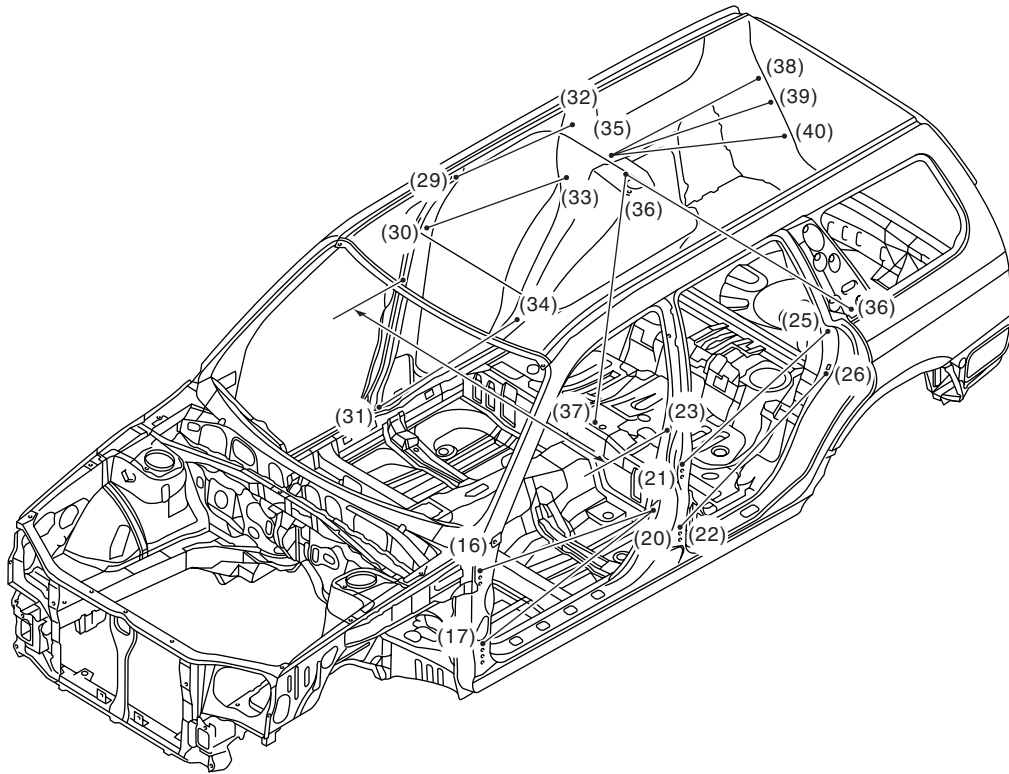

BS-00038

Unit: mm (in)			
Point of measurement	Dimension	Point of measurement	Dimension
(16) RH to (20) RH	980 (38.58)	(30) LH to (33) LH	796 (31.34)
(16) LH to (20) LH	980 (38.58)	(31) RH to (34) RH	759 (29.88)
(17) RH to (20) RH	982 (38.66)	(31) LH to (34) LH	759 (29.88)
(17) LH to (20) LH	982 (38.66)	(35) RH to (38) RH	665 (26.18)
(21) RH to (25) RH	853 (33.58)	(35) LH to (38) LH	665 (26.18)
(21) LH to (25) LH	853 (33.58)	(35) RH to (39) RH	711 (27.99)
(22) RH to (26) RH	895 (35.24)	(35) LH to (39) LH	711 (27.99)
(22) LH to (26) LH	895 (35.24)	(35) RH to (40) RH	784 (30.87)
(23) LH to (23) RH	1,429 (56.26)	(35) LH to (40) LH	784 (30.87)
(29) RH to (32) RH	674 (26.54)	(36) LH to (36) RH	1,221 (48.07)
(29) LH to (32) LH	674 (26.54)	(36) RH to (37) RH	1,067 (42.01)
(30) RH to (33) RH	796 (31.34)	(36) LH to (37) LH	1,067 (42.01)

4. REAR STRUCTURE

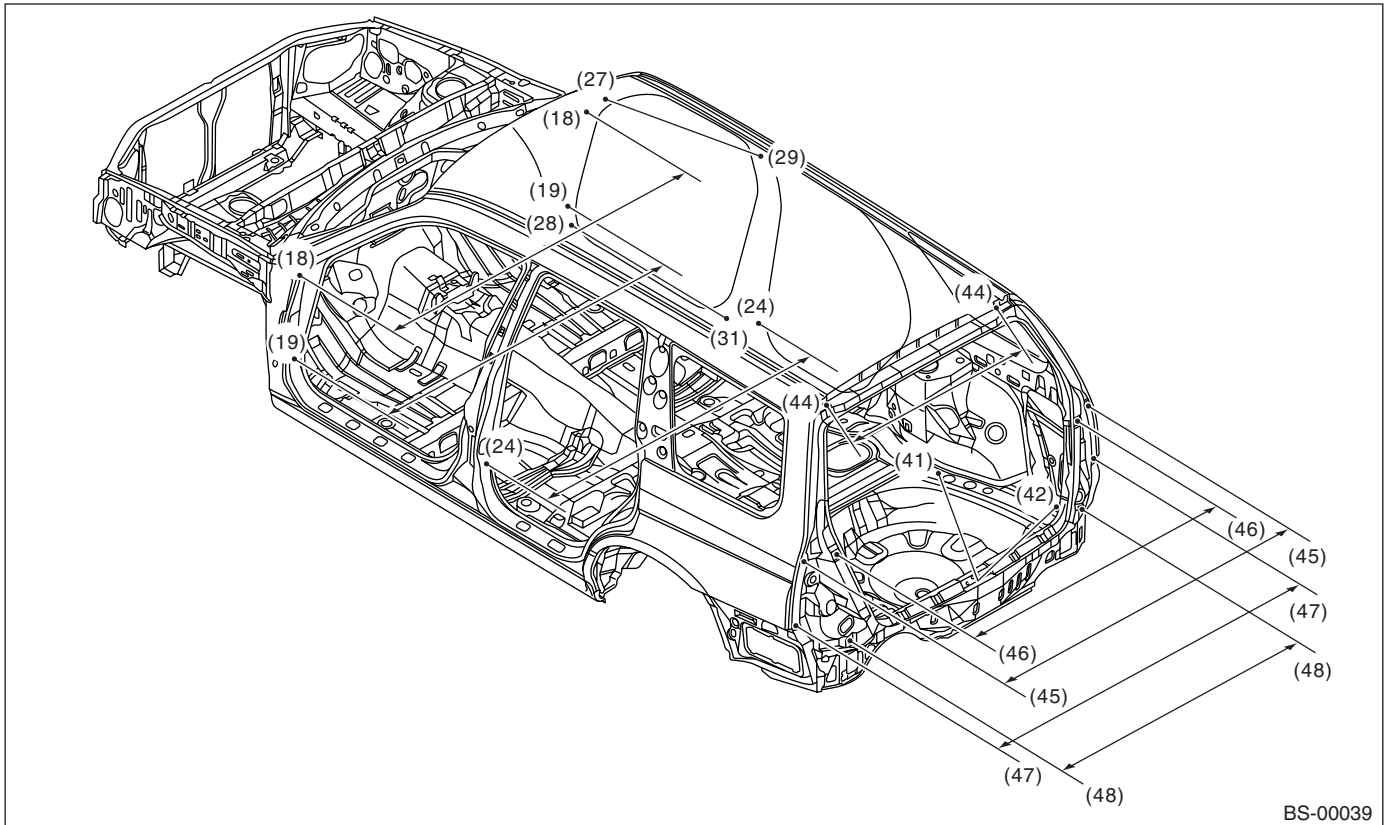

BS-00039

Unit: mm (in)			
Point of measurement	Dimension	Point of measurement	Dimension
(18) RH to (18) LH	1,449 (57.05)	(41) RH to (43) RH	794 (31.26)
(19) RH to (19) LH	1,459 (57.44)	(41) LH to (43) LH	805 (31.69)
(27) RH to (29) RH	1,007 (39.65)	(42) RH to (42) LH	1,110 (43.70)
(27) LH to (29) LH	1,007 (39.65)	(44) RH to (44) LH	878 (34.57)
(28) RH to (31) RH	813 (32.01)	(45) RH to (45) LH	1,474 (58.03)
(28) LH to (31) LH	813 (32.01)	(46) RH to (46) LH	1,252 (49.29)
(24) RH to (24) LH	1,438 (56.61)	(47) RH to (47) LH	1,552 (61.10)
(41) RH to (41) LH	950 (37.40)	(48) RH to (48) LH	1,210 (47.64)

Datum Dimensions

BODY STRUCTURE

INSTRUMENTATION/DRIVER INFO



	Page
1. General Description	2
2. Combination Meter System	3
3. Combination Meter	10
4. Speedometer	12
5. Tachometer	13
6. Fuel Gauge	14
7. Engine Coolant Temperature Gauge	15
8. Ambient Sensor	16
9. Clock	17

