


14. Diagnostic Procedure without Diagnostic Trouble Code (DTC)

A: CHECK FWD SWITCH

DIAGNOSIS:

- LED does not come on even if FWD switch is ON.
- FWD signal circuit is open or shorted.

WIRING DIAGRAM:

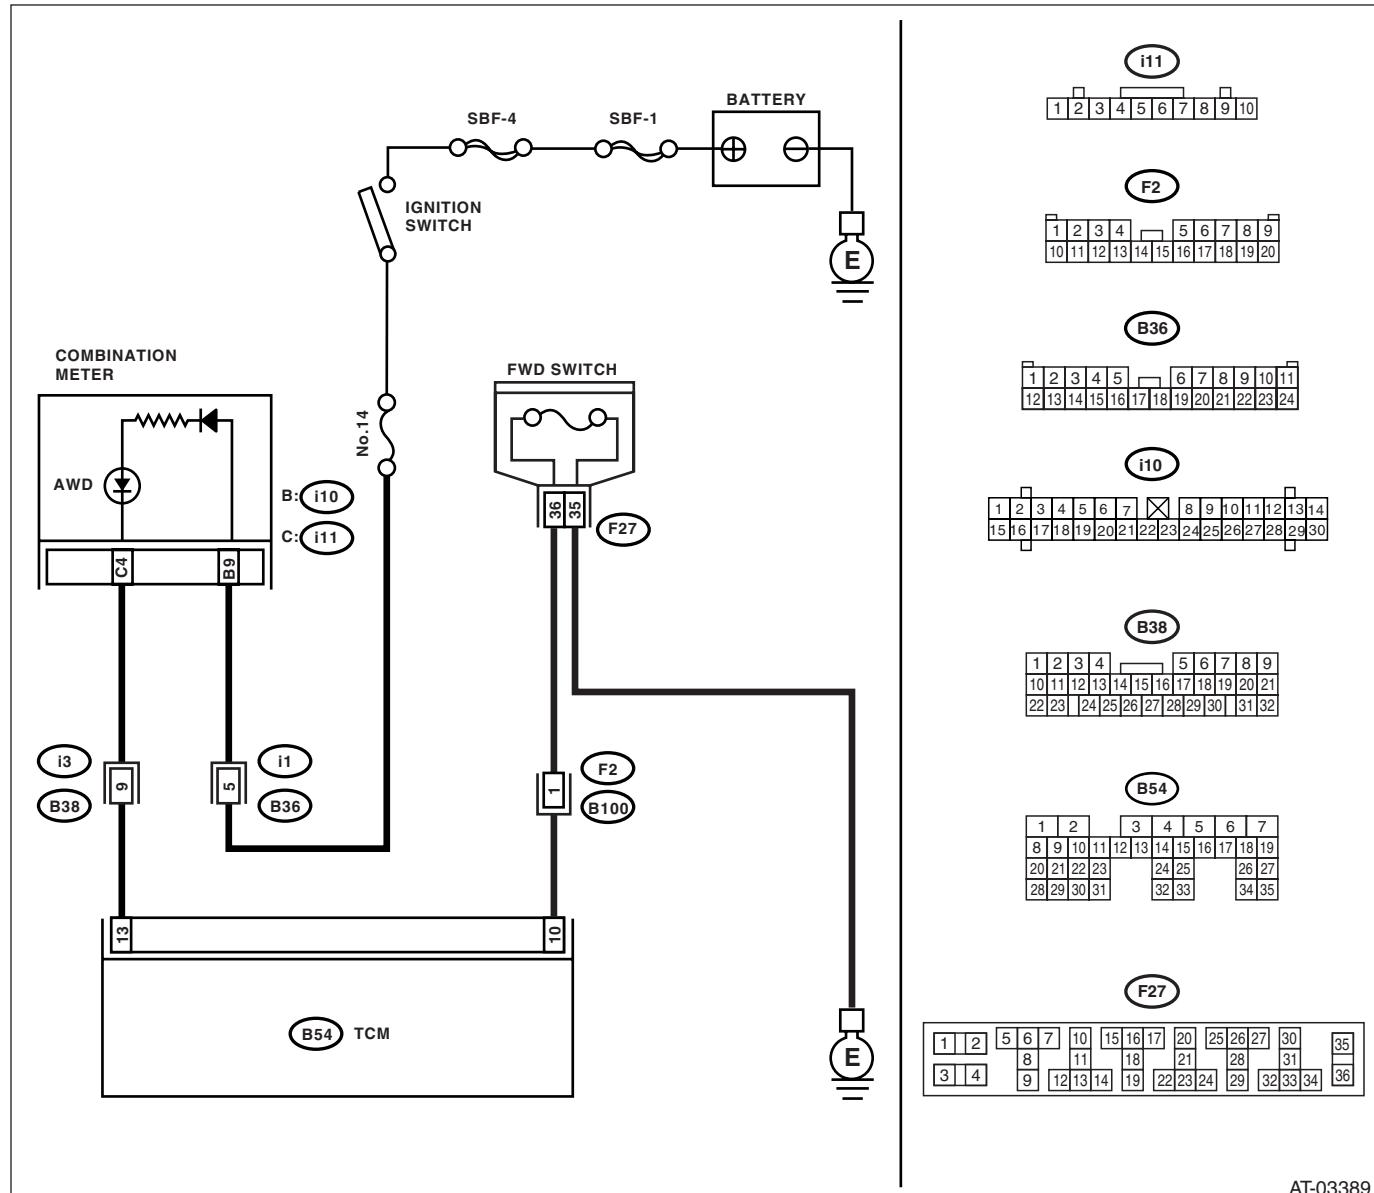

AT-03389

| Step | Check | Yes | No |
|---|---|---|----------------------|
| 1 CHECK FWD SWITCH Connect the Subaru Select Monitor to data link connector, and then check the LED screen. | When the fuse is inserted to FWD switch, does the LED illuminate? | Go to step CHECK SYMPTOM RELATED DIAGNOSTIC. <Ref. to 4AT(D)(diag)-90, INSPECTION, General Diagnostic Table.> | Go to step 2. |

Diagnostic Procedure without Diagnostic Trouble Code (DTC)

AUTOMATIC TRANSMISSION (DIAGNOSTICS)

| Step | Check | Yes | No |
|--|---|---------------|--|
| 2 CHECK AWD INDICATOR LIGHT. 1) Turn the ignition switch OFF. 2) Disconnect the ECM&TCM connector. 3) Turn the ignition switch ON. 4) Short between the combination meter connector and chassis ground. CAUTION: When shorting, be sure to short through the fuse. Connector & terminal (i10) No. 4 — Chassis ground: | Does the AWD indicator light illuminate? | Go to step 3. | Replace the combination meter. <Ref. to IDI-10, Combination Meter.> |
| 3 CHECK HARNESS CONNECTOR BETWEEN TCM AND FWD SWITCH. 1) Turn the ignition switch OFF. 2) Disconnect the connector from the TCM and FWD switches. 3) Measure the resistance of harness between TCM and FWD switch connector. Connector & terminal (B54) No. 10 — (F27) No. 36: | Is the resistance less than 1 Ω ? | Go to step 4. | Repair the open circuit of harness between TCM and FWD switch connectors. |
| 4 CHECK HARNESS CONNECTOR BETWEEN FWD SWITCH AND CHASSIS GROUND. Measure the resistance of harness between FWD switch and chassis ground. Connector & terminal (F27) No. 35 — Chassis ground: | Is the resistance less than 1 Ω ? | Go to step 5. | Repair the open circuit of harness between FWD switch connector and chassis ground. |
| 5 CHECK HARNESS CONNECTOR BETWEEN TCM AND FWD SWITCH. Measure the resistance of harness connector between TCM and body to make sure that circuit does not short. Connector & terminal (B54) No. 10 — Chassis ground: | Is the resistance more than 1 $M\Omega$? | Go to step 6. | Repair the short circuit of harness between TCM and FWD switch connectors. |
| 6 CHECK INPUT SIGNAL FOR TCM. 1) Turn the ignition switch OFF. 2) Connect the connector to TCM and FWD switch. 3) Turn the ignition switch ON. 4) Measure the signal voltage for TCM while installing the fuse to FWD switch connector. Connector & terminal (B54) No. 10 (+) — Chassis ground (-): | Is the voltage less than 1 V? | Go to step 7. | Go to step 11. |
| 7 CHECK INPUT SIGNAL FOR TCM. Measure the signal voltage for TCM with the fuse removed from FWD switch connector. Connector & terminal (B54) No. 10 (+) — Chassis ground (-): | Is the voltage more than 10.5 V? | Go to step 8. | Replace the TCM. <Ref. to 4AT-64, Transmission Control Module (TCM).> |
| 8 CHECK HARNESS CONNECTOR BETWEEN TCM AND COMBINATION METER. 1) Turn the ignition switch OFF. 2) Disconnect the connectors from TCM and combination meter. 3) Measure the resistance of the harness between TCM and the combination meter connector. Connector & terminal (B54) No. 13 — (i11) No. 4: | Is the resistance less than 1 Ω ? | Go to step 9. | Repair the open circuit of harness between TCM and combination meter, and the poor contact of the connector. |

Diagnostic Procedure without Diagnostic Trouble Code (DTC)

AUTOMATIC TRANSMISSION (DIAGNOSTICS)

| Step | Check | Yes | No |
|---|--|--------------------------|--|
| 9 CHECK HARNESS CONNECTOR BETWEEN TCM AND COMBINATION METER. Measure the resistance of the harness connector between TCM and chassis ground to make sure that circuit is not shorted. <i>Connector & terminal (B54) No. 13 — Chassis ground:</i> | Is the resistance more than 1 MΩ? | Go to step 10. | Repair short circuit of harness between TCM and combination meter connector. |
| 10 CHECK OUTPUT SIGNAL OF TCM. 1) Turn the ignition switch OFF. 2) Connect the connector to TCM and combination meter. 3) Turn the ignition switch ON. 4) Measure the signal voltage for TCM while installing and removing the fuse to FWD switch connector. <i>Connector & terminal (B54) No. 13 (+) — Chassis ground (-):</i> | Is the voltage less than 1 V? | Go to step 11. | Go to step 12. |
| 11 CHECK OUTPUT SIGNAL OF TCM. Measure the signal voltage for TCM with the fuse removed from FWD switch connector. <i>Connector & terminal (B54) No. 13 (+) — Chassis ground (-):</i> | Is the voltage more than 10.5 V? | Go to step 12. | Replace the TCM. <Ref. to 4AT-64, Transmission Control Module (TCM).> |
| 12 CHECK FOR POOR CONTACT. | Is there poor contact in FWD switch circuit? | Repair the poor contact. | Replace the TCM. <Ref. to 4AT-64, Transmission Control Module (TCM).> |